



- **Standard Analogue phone**
- **Robust housing, constructed of cold rolled steel with powder coat, with LCD display**
- **Vandal resistant handset and armored cord**
- **Full Rugged & durable keypad, easy to operate**
- **Wall mounting, simple installation**
- **Weather proof protection IP65**
- **4 additional buttons can programmable for auto-dial**
- **Phone line powered**
- **Inductive coupler fitted as standard for hard of hearing**
- **CE, FCC compliant**

The Handset Telephone is designed to meet the needs of client who experience loss through vandalism. Ideal for parking lots, prisons, railway/metro platforms, hospitals, police stations, ATM machines, stadiums, outside building etc.

Housed in cold rolled steel box and manufactured to a high standard, these telephones offer increased resistance to vandalism, and ensure that the primary function of communications is maintained at all times.

Extremely easy to install. The cable entrance is on the back of the phone to prevent from artificial damage, while the keypad is weather and vandal resistant.

#### **Standard Analogue**

As a standard analogue telephone, this unit provides basic telephone functions and can be connected to any standard two-wire telephone line, including analogue PABX lines and PSTN.

#### **Auto dial (Hot line)**

This can be used to initiate a PABX "hot line" or lift handset and wait for reply, where the PABX does the call routing/dialing. Auto-dial on handset lift also available.

#### **The keypad can be used for entering code/password while conversation.**

E.g.: Mounted at ATM machines side. As a service telephone, it auto dials to the help center when users pick up the handset, during the conversion users can enter code/ID number by the keypad when it is required.

As well as the standard telephone range, J&R can supply specials to order with customized Options.

**TECHNICAL SPECIFICATIONS**
**Casing Material**

Cold rolled steel body

Colors: Red, Yellow, Grey, or option

**Handset Material**

ABS material handset with stainless steel spiral cord.

**Keypad**

Weather sealed tactile digital keypad.  
Chrome key and frame made of zinc alloy. Vandal resistance.

**Temperature**

Operating: -30°C to +65°C

Storing: -40°C to +75°C

**Weather Resistance**

IP65

**Ringling Tone**

Shrill warble tone 80 dBA @ 1 metre typical

**Hook switch**

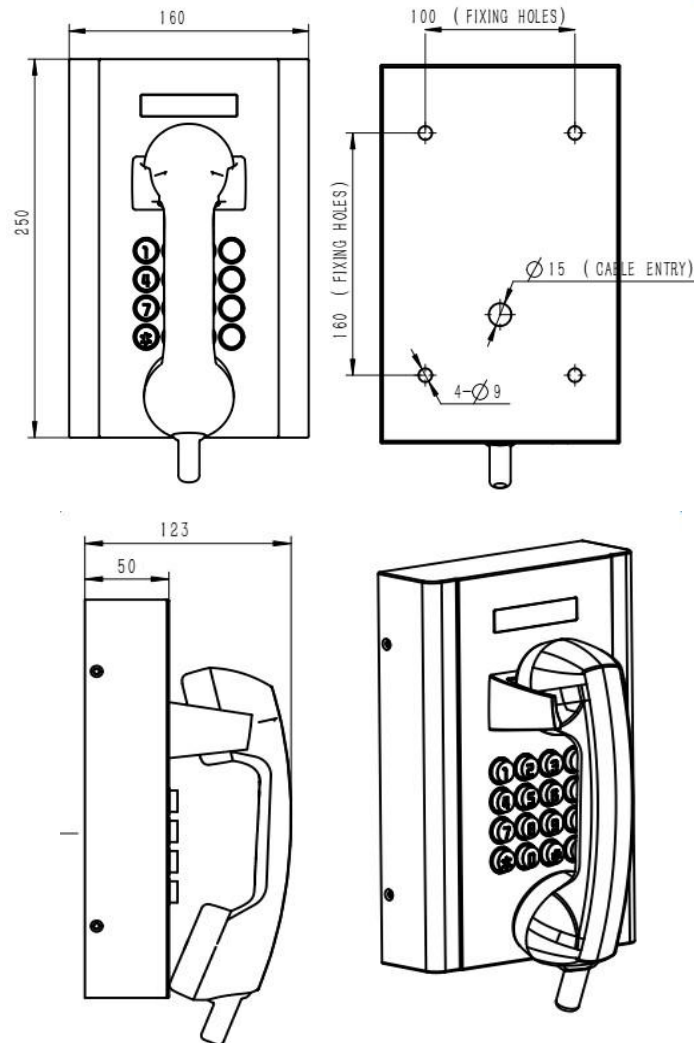
Electronic / magnetic with no visible moving parts

**M.T.B.F.**

Calculated to have an M.T.B.F. in excess of 40,000 hours using

**Weight**

Up to 4 kg depending on option

**DIMENSIONS:**


(Measured in mm)

**ANALOGUE**
**Dialing**

MF (tone)

**Power supply**

Drawn from telephone line

**Lightning / Transients**

Protection to ITU-T k.21 enhanced levels

**Programming**

Can be programmed by keypad or by tone phone remotely

**APPROVALS**


This mark indicates compliance with the:  
Radio & Telecommunications Terminal Equipment  
Directive  
2004/108/EC



This mark indicates compliance with the:  
FCC Part 15 Subpart B Class B

**PACKAGE**

Unit size: 250 \*160 \*123 (mm)

Carton size: 340 \*235 \*165 (mm)

Packaging materials: Pearl cotton, Carton

Net weight: 3.5KG

Gross weight: 4KG